


Steel Wire Rope verotop S

Product information

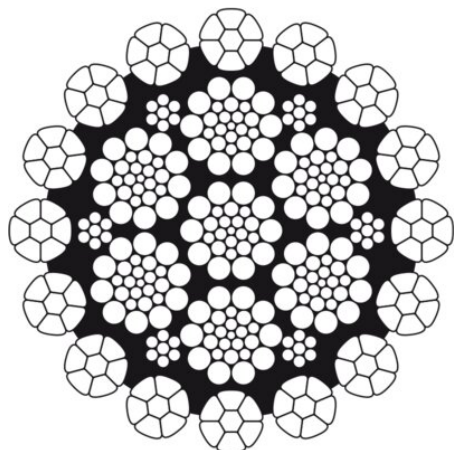

Wire rope construction: verotop S is a very flexible rotation-resistant rope with compacted outer strands and very high breaking strength.

Features:

- Very strong compacted rotation-resistant rope.
- Achieves very good bending fatigue results.
- Offers excellent resistance to crushing and abrasion.
- Possesses perfect spooling behavior on multilayer drum.

ISO 4309 Rope Category No: All Diameters RCN.23-2.

[... Read more](#)

Mobile crane



Piling crane



Marking: According to standard

Standard: EN 12385-4

Note: verotop S can be used either with or without swivel.

Fill factor: 0.742

RCN: 23-2

Tolerance \varnothing : +2% to +4%

Steel Wire Rope verotop S

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104102906270159	29	1,960	Galvanized	zZ	825.9	497	SupplierStandard	421
104102905100159	29	2,160	Bright	sS	860	497	SupplierStandard	421
104102906100159	29	2,160	Bright	zZ	860	497	SupplierStandard	421
104102905300159	29	2,160	Galvanized	sS	860	497	SupplierStandard	421
104102906300159	29	2,160	Galvanized	zZ	860	497	SupplierStandard	421
104103005070159	30	1,960	Bright	sS	883.9	532	SupplierStandard	451
104103006070159	30	1,960	Bright	zZ	883.9	532	SupplierStandard	451
104103005270159	30	1,960	Galvanized	sS	883.9	532	SupplierStandard	451
104103006270159	30	1,960	Galvanized	zZ	883.9	532	SupplierStandard	451
104103005100159	30	2,160	Bright	sS	920.4	532	SupplierStandard	451
104103006100159	30	2,160	Bright	zZ	920.4	532	SupplierStandard	451
104103005300159	30	2,160	Galvanized	sS	920.4	532	SupplierStandard	451
104103006300159	30	2,160	Galvanized	zZ	920.4	532	SupplierStandard	451
104103105070159	31	1,960	Bright	sS	943.8	568	SupplierStandard	482
104103106070159	31	1,960	Bright	zZ	943.8	568	SupplierStandard	482
104103105270159	31	1,960	Galvanized	sS	943.8	568	SupplierStandard	482
104103106270159	31	1,960	Galvanized	zZ	943.8	568	SupplierStandard	482
104103105100159	31	2,160	Bright	sS	982.7	568	SupplierStandard	482
104103106100159	31	2,160	Bright	zZ	982.7	568	SupplierStandard	482
104103105300159	31	2,160	Galvanized	sS	982.7	568	SupplierStandard	482
104103106300159	31	2,160	Galvanized	zZ	982.7	568	SupplierStandard	482