

Master Link VIP 1-leg RUD

Product information



VAK 1 master link with an all direction movable welded VRG connector, thus ensuring that only the correct chain diameter and number of strands can be connected. VIP-Master link is marked by the RUD-ID-TAG® (RFID chip) and with the clear identification number distinguished. Complete identification tag with an integrated chain testing gauge. Pre-assembled connecting bolt and tensioning sleeve.


... [Read more](#)

Marking: According to standard
Temperature range: -40°C up to 200°C
Standard: EN 1677-4

Safety factor: 4:1
Grade: 10

Master Link VIP 1-leg RUD

Blueprint

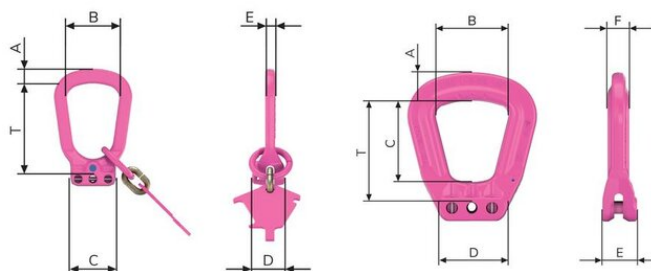

Technical data

Part code	Code	WLL ton	A mm	B mm	C mm	D mm	E mm	T mm	F mm	Weight kg
402100060830	VAK-1/2-4	0.63	9	30	28	20	6	55	-	0.12
402100150831	VBK-1-16	1.5	13	25	54	-	-	82	-	0.38
402100150830	VAK-1-6	1.5	13	60	110	-	-	138	-	0.54
402100150832	VSAK-1-6 / 140	1.5	18	140	260	-	-	342	-	1.95
402100250831	VBK-1-8	2.5	16	34	70	-	-	107	-	0.72
402100250830	VAK-1-8	2.5	16	60	110	-	-	147	-	0.9
402100250832	VSAK-1-8 / 140	2.5	22	140	260	-	-	367	-	3.2
402100250833	VSAK-1-8 / 190	2.5	22	190	350	-	-	457	-	3.67
402100400831	VBK-1-10	4	18	40	85	-	-	131	-	1.15
402100400830	VAK-1-10	4	18	75	135	-	-	181	-	1.44
402100400832	VSAK-1-10 / 140	4	26	140	260	-	-	391	-	3.4
402100400833	VSAK-1-10 / 190	4	26	190	350	-	-	481	-	5.34
402100400834	VSAK-1-10 / 250	4	36	250	460	-	-	591	-	11.77
402100670831	VBK-1-13	6.7	22	50	115	-	-	174	-	2.21
402100670830	VAK-1-13	6.7	22	90	160	-	-	218	-	2.68
402100670832	VSAK-1-13 / 140	6.7	32	140	260	-	-	433	-	7.35
402100670833	VSAK-1-13 / 190	6.7	32	190	350	-	-	523	-	8.7
402100670834	VSAK-1-13 / 250	6.7	36	250	460	-	-	634	-	12.83
402101000831	VBK-1-16	10	26	65	140	-	-	211	-	3.84
402101000830	VAK-1-16	10	26	100	180	-	-	250	-	4.35
402101000832	VSAK-1-16 / 140	10	32	140	260	-	-	471	-	8.96
402101000833	VSAK-1-16 / 190	10	36	190	350	-	-	560	-	12.13

Master Link VIP 1-leg RUD

Technical data

Part code	Code	WLL ton	A mm	B mm	C mm	D mm	E mm	T mm	F mm	Weight kg
402101000834	VSAK-1-16 / 250	10	40	250	460	-	-	671	-	17.2
402101600830	VBK-1-20	16	32	75	170	-	-	264	-	7.65
402101600831	VAK-1-20	16	40	180	340	-	-	434	-	14.74
402101600832	VSAK-1-20 / 250	16	45	250	460	-	-	724	-	28.08
402102000831	VBK-1-22	20	36	110	200	-	-	294	-	9.02
402102000830	VAK-1-22	20	45	180	340	-	-	434	-	17.99
402102000832	VSAK-1-22 / 250	20	51	250	460	-	-	754	-	34.52
402103150831	VBK-1/2-28	31.5	60	190	265	240	120	322	55	31.93
402103150830	VAK-1/2-28	31.5	100	250	280	208	120	360	76	64.3