


Wire Rope Dyform Plus

Product information

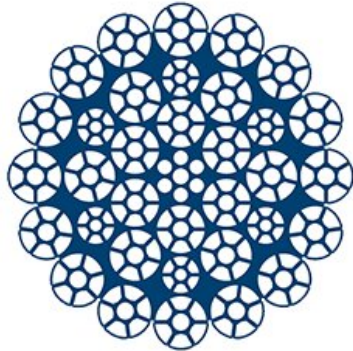

The Hydra is a range of high performance multi strand low rotational ropes for offshore oil and gas applications including offshore cranes, winches, and A&R lines.

- Engineered low rotational characteristics
- Dyform construction for crush & wear resistance
- Enhanced radial stiffness
- Recommended for multilayer spooling
- Low elongation

Rope construction: 35 x K19

Marking: According to standard

Standard: EN 12385-4

RCN: 300

Tolerance Ø: +2% to +4%

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight
109807606270290	76	1,960	Galvanized	zZ	5,248	-	-	-
109810006270290	100	1,960	Galvanized	zZ	8,565	-	-	-