
Lifting Solutions Group
Axel Johnson International

Ferrule GERRO™ COMBI GC-B Talurit®

Product information

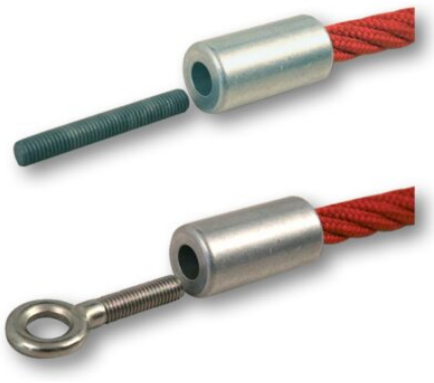

The Gerro Combi B ferrules are pressed on the end of a combination rope together with a threaded rod och M10 (or equivalent) eye-bolt on the opposite end of the rope. This feature makes it a great option when attaching netting to a fixed structure.

Suitable for both M10 and 3/8" UNC bolts. ... *Read more*

Material: Aluminium

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Ferrule GERRO™ COMBI GC-B Talurit®

Technical data

Part code	Code	Ferrule size mm	Max load kN
120101600290	GC16-B	16	15
120101800290	GC18-B	18	20
120102000290	GC20-B	20	20

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved