Lifting Solutions Group
Axel Johnson International

Alloy Swivel Bearing Hoist Hook 8-175N

Product information



Built with ball bearing and enables full swivel feature under load. At least 25% greater WLL than traditional Grade 8 products. Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL. Magnaflux crack detection is performed 100% on each batch

... *Read more*

Material: Quenched and Tempered Alloy Steel.
Marking: According to standard
Temperature range: Tempering temperature minimum 400°C
Standard: EN 1677-1

Safety factor: 4:1
Grade: 10


Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Alloy Swivel Bearing Hoist Hook 8-175N

Blueprint

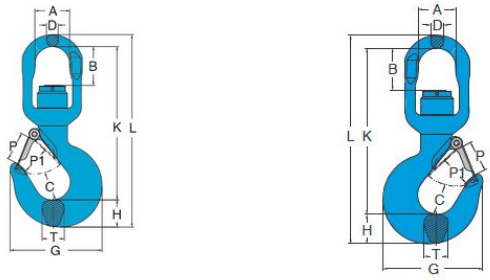

Technical data

Part code	Chain diameter mm	WLL ton	Type	A mm	B mm	C mm	D mm	G mm	H mm	K mm	L mm	P mm	P1 mm	T mm	Weight kg
420500200660	7-8	2	CC	36	29	26	13	91	25	143	181	24	20	22	0.9

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved