


## Evolution TK16

---

Product information

zZ zS sZ G

---

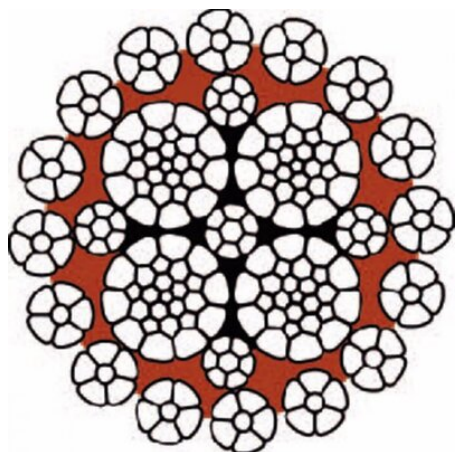

## Evolution TK16

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
104101306300340	13	2,160	Galvanized	zZ	170	-	-	86
104101406270340	14	1,960	Galvanized	zZ	190	-	-	101
104101906270529	19	1,960	Galvanized	zZ	345	-	SupplierStandard	185
104102206270340	22	1,960	Galvanized	zZ	469	-	-	249
104102404270529	24	1,960	Galvanized	sZ	559	-	SupplierStandard	294
104102506270529	25	1,960	Galvanized	zZ	605	-	SupplierStandard	315
104102806270529	28	1,960	Galvanized	zZ	760	-	SupplierStandard	392.5
104103206270340	32	1,960	Galvanized	zZ	993	-	-	510
104103203270340	32	1,960	Galvanized	zS	993	-	-	510
104103204270529	32	1,960	Galvanized	sZ	993	-	SupplierStandard	510
104103403270340	34	1,960	Galvanized	zS	1,141	-	-	608
104103604270529	36	1,960	Galvanized	sZ	1,257	-	SupplierStandard	665