
Lifting Solutions Group
Axel Johnson International

Wire Rope Lifting Sling WLS-373

Product information

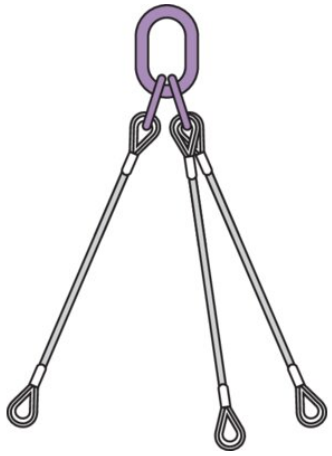

Standard steel wire rope construction: 6x36WS IWRC, 1960N/mm2
Design: Master link in one end and thimble in other ends, aluminum ferrule secured (mechanical spliced).

Load table at Technical Data -> Show table

Please specify the needed (working) length with your request.

Other rope construction and/or end-terminations such as top rings, shackles, hooks, etc.. possible on request. In that case, please contact us to discuss the possible options or specify it with your request.

... *Read more*

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Wire Rope Lifting Sling WLS-373

Technical data

Part code	Diameter mm	WLL ton	WLL 0-45° t	WLL 45-60° t
1607	3	0.25	0.25	0.18
1607	4	0.44	0.44	0.31
1607	5	0.68	0.68	0.49
1607	6	0.98	0.98	0.7
1607	7	1.34	1.34	0.96
1607	8	1.72	1.72	1.23
1607	9	2.18	2.18	1.56
1607	10	2.69	2.69	1.92
1607	11	3.25	3.25	2.32
1607	12	3.85	3.85	2.75
1607	13	4.55	4.55	3.25
1607	14	5.28	5.28	3.77
1607	16	6.9	6.9	4.93
1607	18	8.71	8.71	6.22
1607	20	10.75	10.75	7.68
1607	22	13.03	13.03	9.31
1607	24	15.5	15.5	11.07
1607	26	18.19	18.19	13
1607	28	21.08	21.08	15.06
1607	32	27.56	27.56	19.69
1607	36	34.84	34.84	24.89
1607	40	43.17	43.17	30.84
1607	44	52.04	52.04	37.17
1607	48	62.06	62.06	44.33
1607	52	75.85	75.85	52.04

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved