
Lifting Solutions Group
Axel Johnson International

Clevis Shackle X-066, painted grade 100 shackle

Product information

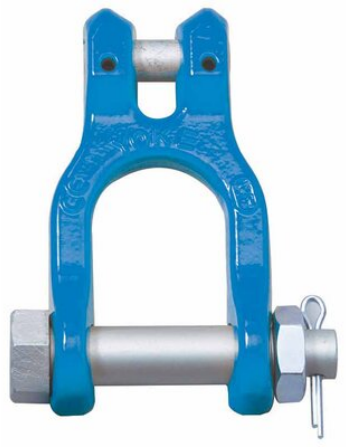

- At least 25% greater WLL than traditional Grade 8 products.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C.
- Magnaflux crack detection is performed 100% on each batch.
- Manufactured in accordance with EN 1677- 1 and ASME B30.26.

When fitting G10 components are added to G8 chain, the sling is rated at G8 WLL
... *Read more*

Material: Quenched and Tempered Alloy Steel
Marking: According to standard, Size, grade, manufacturer ID, traceability
Temperature range: -40° up to +200°C (without reduction in WLL).
Finish: Blue painted
Standard: EN 1677-1

Safety factor: 4:1
Grade: 10


Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Clevis Shackle X-066, painted grade 100 shackle

Blueprint





Technical data

Part code	Chain diameter mm	WLL ton	EWL mm	Weight kg
420100250950	7-8	2.5	59	0.4
420100400950	10	4	78	0.8
420100670950	13	6.7	98	1.4
420101000950	16	10	112	2.5

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved