CERTEX | Lifting Solutions Group
Axel Johnson International

Eye Grab Hook X-041

Product information



At least 25% greater WLL than traditional Grade 8 products.
Testing according to DIN PAS 1061 and ASTM A952/A 952M.
Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL.
Tempering temperature minimum 400°C.
Enables full WLL while in use, thanks to supporting wings which prevent chain link deformation.

... *Read more*

Material: Quenched and Tempered Alloy Steel.
Marking: According to standard, Size, grade, manufacturer ID, traceability.
Temperature range: -40ºC up to +200°C (without reduction in WLL).
Finish: Painted.
Standard: EN 1677-1
Note: Not for use with Omega Link

Safety factor: 4:1
Grade: 10


Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Eye Grab Hook X-041

Blueprint

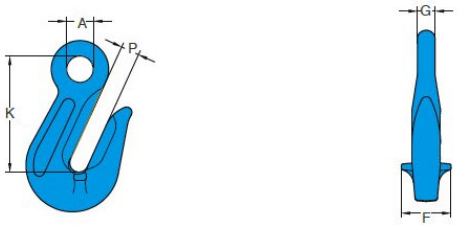

Technical data

Part code	Chain diameter mm	WLL ton	A mm	B mm	F mm	G mm	K mm	P mm	Weight kg
402300140740	6	1.4	13	7	26	8	50	8	0.2
402300250740	7-8	2.5	16	10	30	9	62	10	0.3
402300400740	10	4	20	13	40	13	82	13	0.6
402300670740	13	6.7	26	16	52	16	107	17	1.4
402301000740	16	10	30	18	70	20	132	21	2.4
402301600740	20	16	40	22	73	24	148	24	4
402301900740	22	19	42	24	86	26	166	26	5
402302650740	26	26.5	50	30	110	32	207	33	10.1
402304000740	32	40	62	37	130	42	266	42	24

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved