
Lifting Solutions Group
Axel Johnson International

4 Special Clevis Sub-Assembly GTVK/SUN

Product information

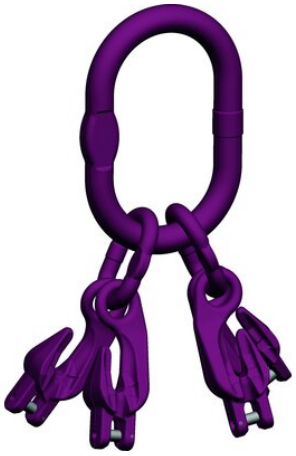

General: For 3 and 4-leg slings with shortening element.

... *Read more*

Temperature range: -40 ºC up to 200 ºC

Safety factor: 4:1
Grade: 12


Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

4 Special Clevis Sub-Assembly GTVK/SUN

Blueprint



Technical data

Part code	Code	Chain diameter	WLL ton	EWL	can be used with single hook acc. DIN15401 up to nr.	WLL 45- 60° ton	d mm	t mm	w mm mm	e mm	Weight kg
403100500080	GTVK/SUN 4-7	7	5	368	10	3.55	27	190	110	368	6.35
403100630080	GTVK/SUN 4-8	8	6.3	368	10	4.5	27	190	110	368	6.39
403101060080	GTVK/SUN 4-10	10	10.6	433	12	7.5	30	190	110	433	10.94
403101700080	GTVK/SUN 4-13	13	17	616	12	11.8	38	275	150	616	25.35
403102560080	GTVK/SUN 4-16	16	25.6	658	12	18.3	38	275	150	658	37.17

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved