

Lifting Eye Nut RUD RM

Product information



Octagonal lifting eye approved for lifting. Lifting with an angle of inclination is allowed with reduction of WLL (see diagram at blueprint) but we strongly recommend using the RUD RM lifting eye only for straight lifting.

Applied harmonized norms: DIN EN ISO 12100: 2011-03


... [Read more](#)

Marking: According to standard, CE-marked
Standard: EN 1677-1

Safety factor: 4:1
Класс: 8

Lifting Eye Nut RUD RM

Blueprint

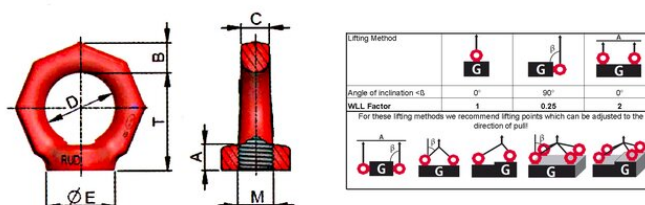

Technical data

Код товара	WLL ton	Thread mm	WLL 90° ton	A mm	B mm	C mm	D mm	E mm	T mm	Bec kg
421100040230	0,4	M6	0,1	12	11	10	25	25	34	0,1
421100080230	0,8	M8	0,2	12	11	10	25	25	34	0,1
421100100230	1	M10	0,25	12	11	10	25	25	34	0,1
421100160230	1,6	M12	0,4	14	13	12	30	30	41	0,2
421100200230	3	M14	0,75	16	15	14	35	35	48	0,3
421100320230	3,2	M16	0,8	16	15	14	35	35	48	0,3
421100480230	4,8	M18	1,2	18	17	16	40	40	55	0,4
421100600235	6	M20	1,5	18	17	16	40	40	55	0,35
421100600230	6	M22	1,5	22	21	20	50	50	70	0,65
421100800235	8	M24	2	22	21	20	50	50	70	0,6
421100800230	8	M27	2	28	26	24	60	60	85	1,4
421101200230	12	M30	3	28	26	24	60	60	85	1,3
421101200235	12	M33	3	37	43	38	90	100	130	5,8
421101600230	16	M36	4	40	43	38	90	100	130	5,65
421102000230	20	M39	5	37	43	38	90	100	130	5,65
421102400230	24	M42	6	40	43	38	90	100	130	5,4
421103200230	32	M48	8	40	43	38	90	100	130	5,3