
Lifting Solutions Group
Axel Johnson International

Endurance 50DB

Product information

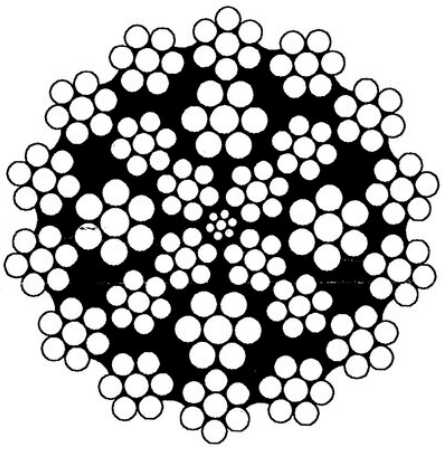

Excellent Resistance to Rotation giving over three times more lifting height than a conventional 18 x 7 class rope
Flexibility is optimised by the unique strand and rope construction.
Langs Lay construction combines excellent wear characteristics with efficient spooling on the drum.

Standard: EN 12385-4
ISO 4309 Rope Category No: All Diameters **RCN.23-1**

... *Read more*

Fill factor: 0.64
RCN: 23-1

Certex Polska
info@certex.pl
+48 91 817 28 49

© October 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Endurance 50DB

Technical data

Код товара	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Вес kg/100m
102100806270139	8	1 960	Galvanized	zZ	49,6	SupplierStandard	27,6
102100805270139	8	1 960	Galvanized	sS	49,6	SupplierStandard	27,6
102100906270139	9	1 960	Galvanized	zZ	62,8	SupplierStandard	34,4
102100905270139	9	1 960	Galvanized	sS	62,8	SupplierStandard	34,4
102101006270139	10	1 960	Galvanized	zZ	77,6	SupplierStandard	42,5
102101005270139	10	1 960	Galvanized	sS	77,6	SupplierStandard	42,5
102101106270139	11	1 960	Galvanized	zZ	93,9	SupplierStandard	51,8
102101105270139	11	1 960	Galvanized	sS	93,9	SupplierStandard	51,8
102101206270139	12	1 960	Galvanized	zZ	112	SupplierStandard	61,9
102101205270139	12	1 960	Galvanized	sS	112	SupplierStandard	61,9
102101306270139	13	1 960	Galvanized	zZ	131	SupplierStandard	72,8
102101305270139	13	1 960	Galvanized	sS	131	SupplierStandard	72,8
102101406270139	14	1 960	Galvanized	zZ	152	SupplierStandard	83,6
102101405270139	14	1 960	Galvanized	sS	152	SupplierStandard	83,6
102101506270139	15	1 960	Galvanized	zZ	175	SupplierStandard	96
102101505270139	15	1 960	Galvanized	sS	175	SupplierStandard	96
102101606270139	16	1 960	Galvanized	zZ	199	SupplierStandard	110
102101605270139	16	1 960	Galvanized	sS	199	SupplierStandard	110
102101706270139	17	1 960	Galvanized	zZ	224	SupplierStandard	121
102101705270139	17	1 960	Galvanized	sS	224	SupplierStandard	121
102101806270139	18	1 960	Galvanized	zZ	251	SupplierStandard	136
102101805270139	18	1 960	Galvanized	sS	251	SupplierStandard	136
102101906270139	19	1 960	Galvanized	zZ	280	SupplierStandard	156
102101905270139	19	1 960	Galvanized	sS	280	SupplierStandard	156
102102006270139	20	1 960	Galvanized	zZ	310	SupplierStandard	168
102102005270139	20	1 960	Galvanized	sS	310	SupplierStandard	168
102102106270139	21	1 960	Galvanized	zZ	342	SupplierStandard	185
102102105270139	21	1 960	Galvanized	sS	342	SupplierStandard	185
102102206270139	22	1 960	Galvanized	zZ	375	SupplierStandard	206
102102205270139	22	1 960	Galvanized	sS	375	SupplierStandard	206

Certex Polska
info@certex.pl
+48 91 817 28 49

© October 2026 - All Rights Reserved