
Lifting Solutions Group
Axel Johnson International

Wire Rope Hydra Plus

Product information

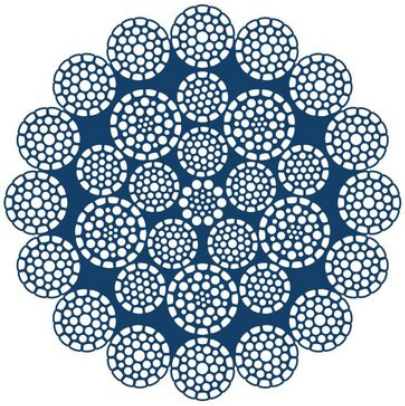

The Hydra is a range of high performance multi strand low rotational ropes for offshore oil and gas applications including offshore cranes, winches, and A&R lines.

- Engineered low rotational characteristics
- Dyform construction for crush & wear resistance
- Enhanced radial stiffness
- Recommended for multilayer spooling
- Low elongation

... *Read more*

RCN: 23-2
Tolerance Ø: 0% to +2%

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Wire Rope Hydra Plus

Technical data

Код товара	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Вес kg/m
104105086270499	50,8	1 960	Galvanized	zZ	2 330	SupplierStandard	12,8
104105086300499	50,8	2 160	Galvanized	zZ	2 450	SupplierStandard	12,8
104105206270499	52	1 960	Galvanized	zZ	2 450	SupplierStandard	13,5
104105206300499	52	2 160	Galvanized	zZ	2 560	SupplierStandard	13,5
104105406270499	54	1 960	Galvanized	zZ	2 640	SupplierStandard	14,5
104105406300499	54	2 160	Galvanized	zZ	2 760	SupplierStandard	14,5
104105606270499	56	1 960	Galvanized	zZ	2 840	SupplierStandard	15,6
104105606300499	56	2 160	Galvanized	zZ	2 970	SupplierStandard	15,6
104106006270499	60	1 960	Galvanized	zZ	3 250	SupplierStandard	17,9
104106006300499	60	2 160	Galvanized	zZ	3 410	SupplierStandard	17,9
104106206270499	62	1 960	Galvanized	zZ	3 480	SupplierStandard	19,1
104106206300499	62	2 160	Galvanized	zZ	3 640	SupplierStandard	19,1
104106406270499	64	1 960	Galvanized	zZ	3 700	SupplierStandard	20,4
104106406300499	64	2 160	Galvanized	zZ	3 880	SupplierStandard	20,4
104106606270499	66	1 960	Galvanized	zZ	3 940	SupplierStandard	21,7
104106606300499	66	2 160	Galvanized	zZ	4 120	SupplierStandard	21,7
104106806270499	68	1 960	Galvanized	zZ	4 180	SupplierStandard	23
104106806300499	68	2 160	Galvanized	zZ	4 380	SupplierStandard	23
104107006270499	70	1 960	Galvanized	zZ	4 430	SupplierStandard	24,4
104107006300499	70	2 160	Galvanized	zZ	4 640	SupplierStandard	24,4
104107206270499	72	1 960	Galvanized	zZ	4 680	SupplierStandard	25,8
104107206300499	72	2 160	Galvanized	zZ	4 910	SupplierStandard	25,8
104107406270499	74	1 960	Galvanized	zZ	4 950	SupplierStandard	27,2
104107406300499	74	2 160	Galvanized	zZ	5 180	SupplierStandard	27,2
104107606270499	76	1 960	Galvanized	zZ	5 220	SupplierStandard	28,7
104107606300499	76	2 160	Galvanized	zZ	5 470	SupplierStandard	28,7
104107806270499	78	1 960	Galvanized	zZ	5 490	SupplierStandard	30,3
104107806300499	78	2 160	Galvanized	zZ	5 760	SupplierStandard	30,3
104108006270499	80	1 960	Galvanized	zZ	5 780	SupplierStandard	31,8
104108006300499	80	2 160	Galvanized	zZ	6 060	SupplierStandard	31,8
104108206270499	82	1 960	Galvanized	zZ	5 890	SupplierStandard	32,3

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Wire Rope Hydra Plus

Technical data

Код товара	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Вес kg/m
104108206300499	82	2 160	Galvanized	zZ	6 170	SupplierStandard	32,3
104108406270499	84	1 960	Galvanized	zZ	6 180	SupplierStandard	33,9
104108406300499	84	2 160	Galvanized	zZ	6 480	SupplierStandard	33,9
104108606270499	86	1 960	Galvanized	zZ	6 480	SupplierStandard	35,6
104108606300499	86	2 160	Galvanized	zZ	6 790	SupplierStandard	35,6
104108806270499	88	1 960	Galvanized	zZ	6 780	SupplierStandard	37,3
104108806300499	88	2 160	Galvanized	zZ	7 110	SupplierStandard	37,3
104109006270499	90	1 960	Galvanized	zZ	7 100	SupplierStandard	39
104109006300499	90	2 160	Galvanized	zZ	7 430	SupplierStandard	39
104109206270499	92	1 960	Galvanized	zZ	7 420	SupplierStandard	40,7
104109206300499	92	2 160	Galvanized	zZ	7 770	SupplierStandard	40,7
104109606270499	96	1 960	Galvanized	zZ	8 070	SupplierStandard	44,3
104109606300499	96	2 160	Galvanized	zZ	8 450	SupplierStandard	44,3
104109806270499	98	1 960	Galvanized	zZ	8 410	SupplierStandard	46,2
104109806300499	98	2 160	Galvanized	zZ	8 810	SupplierStandard	46,2
104110206270499	102	1 960	Galvanized	zZ	9 170	SupplierStandard	50,4
104110206300499	102	2 160	Galvanized	zZ	9 600	SupplierStandard	50,4
104110606270499	106	1 960	Galvanized	zZ	9 910	SupplierStandard	54,4
104110606300499	106	2 160	Galvanized	zZ	10 370	SupplierStandard	54,4
104110806270499	108	1 960	Galvanized	zZ	10 270	SupplierStandard	56,5
104110806300499	108	2 160	Galvanized	zZ	10 760	SupplierStandard	56,5
104111006270499	110	1 960	Galvanized	zZ	10 660	SupplierStandard	58,7
104111006300499	110	2 160	Galvanized	zZ	11 160	SupplierStandard	58,7
104111606270499	116	1 960	Galvanized	zZ	11 840	SupplierStandard	65,2
104112206270499	122	1 960	Galvanized	zZ	13 100	SupplierStandard	72,2
104112406270499	124	1 960	Galvanized	zZ	13 530	SupplierStandard	74,5
104112806270499	128	1 960	Galvanized	zZ	14 410	SupplierStandard	79,4
104113006270499	130	1 960	Galvanized	zZ	14 870	SupplierStandard	81,9
104113506270499	135	1 960	Galvanized	zZ	15 290	SupplierStandard	88,4
104113806270499	138	1 960	Galvanized	zZ	15 980	SupplierStandard	92,3
104114206270499	142	1 960	Galvanized	zZ	16 910	SupplierStandard	97,8

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Wire Rope Hydra Plus

Technical data

Код товара	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Вес kg/m
104114606270499	146	1 960	Galvanized	zZ	17 870	SupplierStandard	103
104115006270499	150	1 960	Galvanized	zZ	18 850	SupplierStandard	109
104115206270499	152	1 960	Galvanized	zZ	19 350	SupplierStandard	112

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved