

Grommet 7x6x19M-CW


Product information

General: Cable layed grommets can be used in all types of lifting operations. They come in different lengths and designs. This design gives great flexibility.

Cableayed grommets 7x6x19M-CW

Marking: According to standard

Standard: EN 13414-3

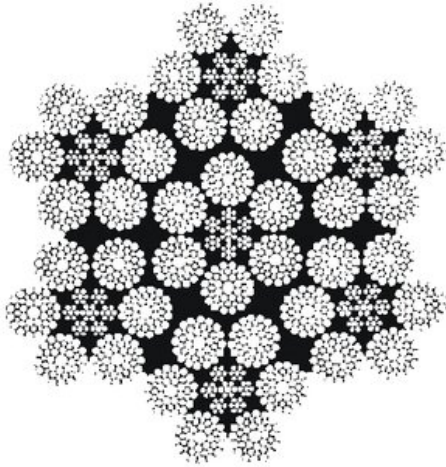

Код товара	Rope diameter mm	WLL ton	MBL ton	Min. circ m	Grommet Rope diameter mm	Bec kg/m
1622	3	1,27	6,35	0,32	9	0,257
1622	4	2,258	11,29	0,42	12	0,457
1622	5	5,081	17,64	0,53	15	0,714
1622	6	5,96	25,4	0,63	18	1,029
1622	6,5	5,963	29,81	0,68	19,5	1,207
1622	7	6,915	34,58	0,74	21	1,4
1622	8	9,032	45,16	0,84	24	1,829
1622	9	11,431	57,16	0,95	27	2,315
1622	10	14,113	70,56	1,05	30	2,858