

# JACKS



[Bottle jacks »](#)

[Floor jacks »](#)

[Mechanical jacks »](#)

[Toe jacks »](#)

[Farm jacks »](#)

[Low height lifting cylinders »](#)

## BOTTLE JACKS

- 2 - 20 t jacks have a rotatable adjustment piece on top which can be used to increase the lifting height (does not apply to the low model)
- can also be used horizontally
- paint coated



10 t low model  
also available  
(TUNKKI10PM)



Jacks are packed  
in a display box



WLL	Min. height	Lifting height	Adjustment height	Max. height	Weight	Product code
t	mm	mm	mm	mm	approx. kg	
<b>NEW</b> 2,0	168	100	48	316	2,35	TUNKKI20P
5,0	207	125	70	402	3,9	TUNKKI50P
10,0	222	145	80	447	5,2	TUNKKI100P
10,0	124	96	-	220	7,7	TUNKKI10PM
15,0	227	150	80	457	7,9	TUNKKI160P
20,0	235	150	60	445	9,7	TUNKKI200P
32,0	260	160	-	420	17,8	TUNKKI300P
50,0	280	170	-	450	25,8	TUNKKI500P

## HYDRAULIC AIR BOTTLE JACKS

- hydraulic jack operating with pressured air
- quick to use
- equipped with ¼ inch connector which is changeable
- required operating pressure 8-13,8 bar
- can also be operated normally with a lever
- paint coated



WLL	Min. height	Lifting height	Adjustment height	Max. height	Weight	Product code
t	mm	mm	mm	mm	kg	
5	210	140	60	430	6,0	TUNKKI05AIR
12	265	165	80	510	13,5	TUNKKI12AIR
20	265	165	80	510	17,7	TUNKKI20AIR

## HYDRAULICAL TOE JACKS


- lifting from extremely low at the tip of the jack or from top of the jack
- unbeatable tool for lifting and moving heavy machines and pieces etc.
- paint coated



WLL	Max. height from tip	Max. height from top	Lowest height from tip	Lowest height from top	Weight	Product code
t	mm	mm	mm	mm	kg	
5	230	573	20	370	20	TUNKKI5H
10	265	650	30	420	35	TUNKKI10H
25	273	720	58	505	109	TUNKKI25H

## FARM JACKS

- for farms, off road equipment, garages etc.
- lightweight and efficient
- paint coated

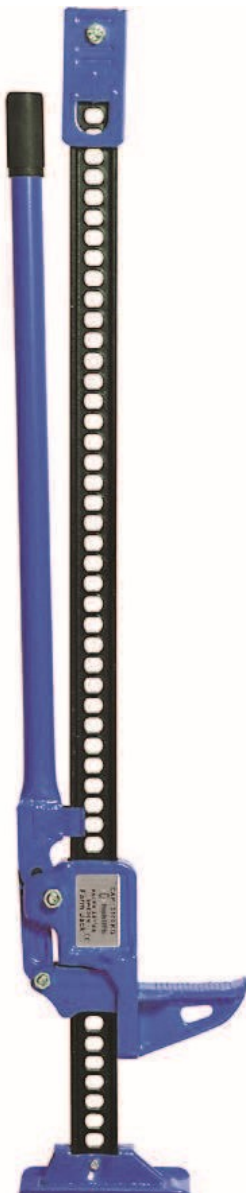


WLL	Lifting point min. height	Lifting point max. height	Weight	Product code
130 - 300 mm 300 - 500 mm over 500 mm t	mm	mm	kg	
3	125	318	11,0	TUNKHATA3520
2 1,6 0,5	130	1060	13,0	TUNKHATA3548
2 1,6 0,5	130	1325	14,5	TUNKHATA3560



TUNKHATA3520

## JACKS FOR LIFTING FROM THE SIDE OR TOP

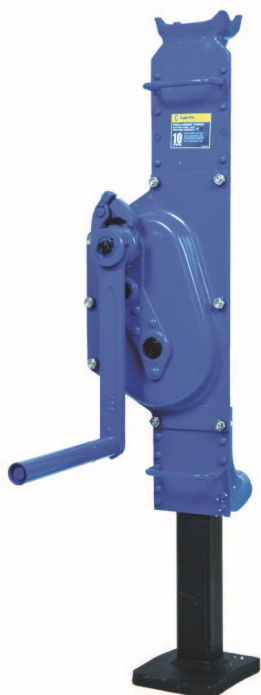

- lifting with a fixed crank
- two different lifting points
- paint coated

WLL	Min. height	Min. side lifting point height	Lifting height	Base size	Weight	Product code
t	mm	mm	mm	mm	approx. kg	
3	730	75	350	130x 138	20	TUNKKI03S
5	730	70	300	140x170	28	TUNKKI05S
10	800	90	300	140x170	46	TUNKKI10S

## TRUCK JACKS



- two sizes 22 t and 35 t
- pressured air - hydraulic heavy weight jack
- required operating pressure 7-10 bar
- adjustment blocks of different sizes affecting the lifting height are included
- paint coated

WLL	Min. height	Max. height	Lifting height	Weight	Product code
t	mm	mm	mm	kg	
22	230	430	200	45,0	TUNKKI22AIR
35	245	490	245	46,0	TUNKKI35AIR



## FLOOR JACK WITH AN ALUMINIUM BODY 1,5T

- high class light metal jack
- lifting capacity 1,5 t
- equipped with double cylinders



WLL	Min. height	Max. height	Lifting height	Weight	Product code
t	mm	mm	mm	kg	
1,5	90	358	268	14,3	TUNKHA15AL



Packed in a display box

## FLOOR JACK 2,5T

- low-profile floor jack
- durable steel body
- paint coated



WLL	Min. height	Max. height	Lifting height	Weight	Product code
t	mm	mm	mm	kg	
2,5	85	455	370	34,8	TUNKHA25MA



Packed in a display box

## FLOOR JACKS 5T AND 10T

- long steel body
- lifting with either handle or pedal
- lowering with handle
- paint coated


WLL	Min. height	Max. height	Lifting height	Weight	Product code
t	mm	mm	mm	kg	
5	150	560	410	87,0	TUNKHA5PRO
10	160	560	400	146,0	TUNKHA10PRO



## FORKLIFT JACK

- designed for forklift use
- paint coated

WLL lifting point	WLL lifting point	Max. height	Max. height	Min. height	Min. height	Weight	Product code
A	B	A	B	A	B	kg	
t	t	mm	mm	mm	mm		
5	4	740	440	420	70	45,0	TUNKTRU45

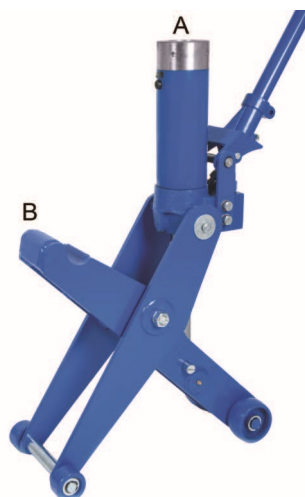

## HYDRAULIC LIFTING CYLINDERS

- lifting is performed hydraulically
- lifting cylinders always require an external pump
- paint coated



WLL	Min. height	Lifting height	Size	Operating pressure	Oil volume	Weight	Product code
t	mm	mm	mm	bar	l	approx. kg	
5	40	9	63x44x40	500	0,012	0,75	TUNKKI5SYL
10	45	11	78x56x45	520	0,022	1,3	TUNKKI10SYL
15	50	13	92x68x50	600	0,04	2,0	TUNKKI15SYL
75	85	21	186x155x85	600	0,13	15,3	TUNKKI75SYL
100	95	25	206x175x95	640	0,45	21,0	TUNKKI100SYL

## HAND PUMPS FOR HYDRAULIC CYLINDERS

- hand operated hydraulic pumps for lifting cylinders



Operating pressure	Oil flow rate with high pressure	Oil flow rate with low pressure	Usable oil amount	Weight	Product code
bar	ml	ml	l	kg	
63	3,0	20,0	1,9	13,4	TUNKKIPUMP3