


## Endurance 50DB

### Інформація про товар

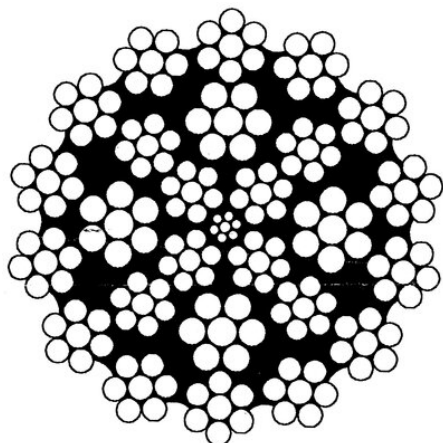

Excellent Resistance to Rotation giving over three times more lifting height than a conventional 18 x 7 class rope  
Flexibility is optimised by the unique strand and rope construction.  
Langs Lay construction combines excellent wear characteristics with efficient spooling on the drum.

**Standard:** EN 12385-4

**ISO 4309 Rope Category No:** All Diameters RCN.23-1

[... Read more](#)

**Коефіцієнт заповнення:** 0.64  
**RCN:** 23-1

## Endurance 50DB

### Technical data

Код товару	Діаметр троса мм	Tensile strength N/mm <sup>2</sup>	Покриття	Rope lay	Мінімальна розривна сила кН	2160N/мм <sup>2</sup>	Площа перерізу мм <sup>2</sup>	Масило	Вага kg/100m
102100806270139	8	1 960	Оцинковане	zZ	49,6		-	SupplierStandard	27,6
102100805270139	8	1 960	Оцинковане	sS	49,6		-	SupplierStandard	27,6
102100906270139	9	1 960	Оцинковане	zZ	62,8		-	SupplierStandard	34,4
102100905270139	9	1 960	Оцинковане	sS	62,8		-	SupplierStandard	34,4
102101006270139	10	1 960	Оцинковане	zZ	77,6		-	SupplierStandard	42,5
102101005270139	10	1 960	Оцинковане	sS	77,6		-	SupplierStandard	42,5
102101106270139	11	1 960	Оцинковане	zZ	93,9		-	SupplierStandard	51,8
102101105270139	11	1 960	Оцинковане	sS	93,9		-	SupplierStandard	51,8
102101206270139	12	1 960	Оцинковане	zZ	112		-	SupplierStandard	61,9
102101205270139	12	1 960	Оцинковане	sS	112		-	SupplierStandard	61,9
102101306270139	13	1 960	Оцинковане	zZ	131		-	SupplierStandard	72,8
102101305270139	13	1 960	Оцинковане	sS	131		-	SupplierStandard	72,8
102101406270139	14	1 960	Оцинковане	zZ	152		-	SupplierStandard	83,6
102101405270139	14	1 960	Оцинковане	sS	152		-	SupplierStandard	83,6
102101506270139	15	1 960	Оцинковане	zZ	175		-	SupplierStandard	96
102101505270139	15	1 960	Оцинковане	sS	175		-	SupplierStandard	96
102101606270139	16	1 960	Оцинковане	zZ	199		-	SupplierStandard	110
102101605270139	16	1 960	Оцинковане	sS	199		-	SupplierStandard	110
102101706270139	17	1 960	Оцинковане	zZ	224		-	SupplierStandard	121
102101705270139	17	1 960	Оцинковане	sS	224		-	SupplierStandard	121
102101806270139	18	1 960	Оцинковане	zZ	251		-	SupplierStandard	136
102101805270139	18	1 960	Оцинковане	sS	251		-	SupplierStandard	136
102101906270139	19	1 960	Оцинковане	zZ	280		-	SupplierStandard	156
102101905270139	19	1 960	Оцинковане	sS	280		-	SupplierStandard	156
102102006270139	20	1 960	Оцинковане	zZ	310		-	SupplierStandard	168
102102005270139	20	1 960	Оцинковане	sS	310		-	SupplierStandard	168
102102106270139	21	1 960	Оцинковане	zZ	342		-	SupplierStandard	185
102102105270139	21	1 960	Оцинковане	sS	342		-	SupplierStandard	185
102102206270139	22	1 960	Оцинковане	zZ	375		-	SupplierStandard	206
102102205270139	22	1 960	Оцинковане	sS	375		-	SupplierStandard	206