

Lifting Solutions Group
Axel Johnson International

Steel Wire Rope M8DPK

Інформація про товар

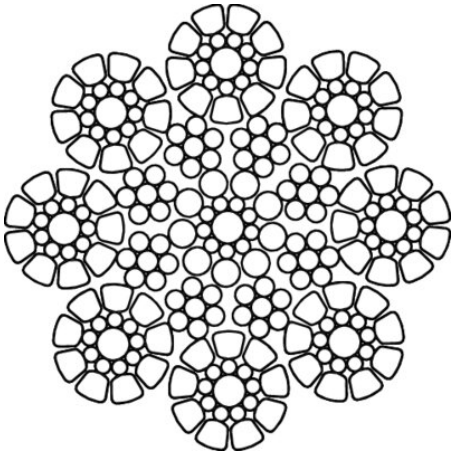

Overhead cranes



Tower crane



Crawler crane



A compacted 8-strand double parallel lay rope, non-rotation resistant. The PWRC-steel core is made of uncompacted strands and the external strands are compacted.

M8DPK offers very high breaking force, reduced elongation and good flexibility. Suitable for applications that don't require rotation resistant ropes but demands high breaking forces.

- Double parallel construction extends service of life of the rope
- High performance and higher breaking load due to closing rope simultaneously
- Compacted strands increase the high breaking load and reduce abrasion of pulleys
- Minimal elongation at loading
- Thin diameters of wires in inner layer retain flexibility on the rope
- Suitable for multilayer spoling

... *Read more*

Маркування: Згідно зі стандартом
Стандарт: EN 12385-4

Коефіцієнт заповнення: 0,70
RCN: 04

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Steel Wire Rope M8DPK

Technical data

Код товару	Діаметр троса мм	Tensile strength N/mm²	Покриття	Rope lay	Мінімальна розривна сила кН 2160Н\мм2	Площа перерізу мм²	Мастило	Вага kg/100m
103101103300422	11	2 160	Оцинковане	zS	128	66,5	A-2	56

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved