
Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Product information

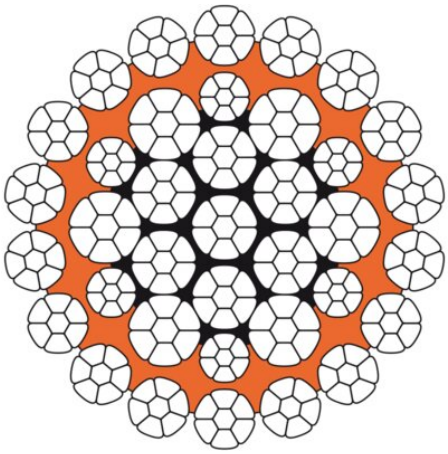

zZ sS zS sZ G

Wire rope construction: Verotop P is a rotation-resistant rope with compacted strands
and a rope core covered with a plastic layer.

Features:

- Very high breaking strength.
- Provides a very stable rope structure and achieves excellent bending fatigue results.
- Offers excellent crushing and very good abrasion resistance.
- Possesses perfect spooling behavior on multilayer drum.

ISO 4309 Rope Category No: All Diameters **RCN.23-3.**

... *Read more*

Offshore crane



Piling crane



Mobile port crane



Marking: According to standard
Standard: EN 12385-4
Note: verotop P can be used either with or without swivel.

Fill factor: 0.73
RCN: 23-3
Tolerance Ø: +2% to +4%

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104101605070149	16	1,960	Bright	sS	241.7	147	SupplierStandard	125
104101604070149	16	1,960	Bright	sZ	241.7	147	SupplierStandard	125
104101603070149	16	1,960	Bright	zS	241.7	147	SupplierStandard	125
104101606070149	16	1,960	Bright	zZ	241.7	147	SupplierStandard	125
104101605270149	16	1,960	Galvanized	sS	241.7	147	SupplierStandard	125
104101604270149	16	1,960	Galvanized	sZ	241.7	147	SupplierStandard	125
104101603270149	16	1,960	Galvanized	zS	241.7	147	SupplierStandard	125
104101606270149	16	1,960	Galvanized	zZ	241.7	147	SupplierStandard	125
104101605100149	16	2,160	Bright	sS	252.7	147	SupplierStandard	125
104101604100149	16	2,160	Bright	sZ	252.7	147	SupplierStandard	125
104101603100149	16	2,160	Bright	zS	252.7	147	SupplierStandard	125
104101606100149	16	2,160	Bright	zZ	252.7	147	SupplierStandard	125
104101605300149	16	2,160	Galvanized	sS	252.7	147	SupplierStandard	125
104101604300149	16	2,160	Galvanized	sZ	252.7	147	SupplierStandard	125
104101603300149	16	2,160	Galvanized	zS	252.7	147	SupplierStandard	125
104101606300149	16	2,160	Galvanized	zZ	252.7	147	SupplierStandard	125
104101705070149	17	1,960	Bright	sS	272.8	166	SupplierStandard	141
104101704070149	17	1,960	Bright	sZ	272.8	166	SupplierStandard	141
104101703070149	17	1,960	Bright	zS	272.8	166	SupplierStandard	141
104101706070149	17	1,960	Bright	zZ	272.8	166	SupplierStandard	141
104101705270149	17	1,960	Galvanized	sS	272.8	166	SupplierStandard	141
104101704270149	17	1,960	Galvanized	sZ	272.8	166	SupplierStandard	141
104101703270149	17	1,960	Galvanized	zS	272.8	166	SupplierStandard	141
104101706270149	17	1,960	Galvanized	zZ	272.8	166	SupplierStandard	141
104101705100149	17	2,160	Bright	sS	285.3	166	SupplierStandard	141
104101704100149	17	2,160	Bright	sZ	285.3	166	SupplierStandard	141
104101703100149	17	2,160	Bright	zS	285.3	166	SupplierStandard	141
104101706100149	17	2,160	Bright	zZ	285.3	166	SupplierStandard	141
104101705300149	17	2,160	Galvanized	sS	285.3	166	SupplierStandard	141
104101704300149	17	2,160	Galvanized	sZ	285.3	166	SupplierStandard	141
104101703300149	17	2,160	Galvanized	zS	285.3	166	SupplierStandard	141

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104101706300149	17	2,160	Galvanized	zZ	285.3	166	SupplierStandard	141
104101805070149	18	1,960	Bright	sS	305.8	186	SupplierStandard	158
104101804070149	18	1,960	Bright	sZ	305.8	186	SupplierStandard	158
104101803070149	18	1,960	Bright	zS	305.8	186	SupplierStandard	158
104101806070149	18	1,960	Bright	zZ	305.8	186	SupplierStandard	158
104101805270149	18	1,960	Galvanized	sS	305.8	186	SupplierStandard	158
104101804270149	18	1,960	Galvanized	sZ	305.8	186	SupplierStandard	158
104101803270149	18	1,960	Galvanized	zS	305.8	186	SupplierStandard	158
104101806270149	18	1,960	Galvanized	zZ	305.8	186	SupplierStandard	158
104101805100149	18	2,160	Bright	sS	319.8	186	SupplierStandard	158
104101804100149	18	2,160	Bright	sZ	319.8	186	SupplierStandard	158
104101803100149	18	2,160	Bright	zS	319.8	186	SupplierStandard	158
104101806100149	18	2,160	Bright	zZ	319.8	186	SupplierStandard	158
104101805300149	18	2,160	Galvanized	sS	319.8	186	SupplierStandard	158
104101804300149	18	2,160	Galvanized	sZ	319.8	186	SupplierStandard	158
104101803300149	18	2,160	Galvanized	zS	319.8	186	SupplierStandard	158
104101806300149	18	2,160	Galvanized	zZ	319.8	186	SupplierStandard	158
104101905070149	19	1,960	Bright	sS	340.8	207	SupplierStandard	176
104101904070149	19	1,960	Bright	sZ	340.8	207	SupplierStandard	176
104101903070149	19	1,960	Bright	zS	340.8	207	SupplierStandard	176
104101906070149	19	1,960	Bright	zZ	340.8	207	SupplierStandard	176
104101905270149	19	1,960	Galvanized	sS	340.8	207	SupplierStandard	176
104101904270149	19	1,960	Galvanized	sZ	340.8	207	SupplierStandard	176
104101903270149	19	1,960	Galvanized	zS	340.8	207	SupplierStandard	176
104101906270149	19	1,960	Galvanized	zZ	340.8	207	SupplierStandard	176
104101905100149	19	2,160	Bright	sS	356.3	207	SupplierStandard	176
104101904100149	19	2,160	Bright	sZ	356.3	207	SupplierStandard	176
104101903100149	19	2,160	Bright	zS	356.3	207	SupplierStandard	176
104101906100149	19	2,160	Bright	zZ	356.3	207	SupplierStandard	176
104101905300149	19	2,160	Galvanized	sS	356.3	207	SupplierStandard	176
104101904300149	19	2,160	Galvanized	sZ	356.3	207	SupplierStandard	176

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104101903300149	19	2,160	Galvanized	zS	356.3	207	SupplierStandard	176
104101906300149	19	2,160	Galvanized	zZ	356.3	207	SupplierStandard	176
104102005070149	20	1,960	Bright	sS	377.6	229	SupplierStandard	195
104102004070149	20	1,960	Bright	sZ	377.6	229	SupplierStandard	195
104102003070149	20	1,960	Bright	zS	377.6	229	SupplierStandard	195
104102006070149	20	1,960	Bright	zZ	377.6	229	SupplierStandard	195
104102005270149	20	1,960	Galvanized	sS	377.6	229	SupplierStandard	195
104102004270149	20	1,960	Galvanized	sZ	377.6	229	SupplierStandard	195
104102003270149	20	1,960	Galvanized	zS	377.6	229	SupplierStandard	195
104102006270149	20	1,960	Galvanized	zZ	377.6	229	SupplierStandard	195
104102005100149	20	2,160	Bright	sS	394.8	229	SupplierStandard	195
104102004100149	20	2,160	Bright	sZ	394.8	229	SupplierStandard	195
104102003100149	20	2,160	Bright	zS	394.8	229	SupplierStandard	195
104102006100149	20	2,160	Bright	zZ	394.8	229	SupplierStandard	195
104102005300149	20	2,160	Galvanized	sS	394.8	229	SupplierStandard	195
104102004300149	20	2,160	Galvanized	sZ	394.8	229	SupplierStandard	195
104102003300149	20	2,160	Galvanized	zS	394.8	229	SupplierStandard	195
104102006300149	20	2,160	Galvanized	zZ	394.8	229	SupplierStandard	195
104102105070149	21	1,960	Bright	sS	416.3	253	SupplierStandard	215
104102104070149	21	1,960	Bright	sZ	416.3	253	SupplierStandard	215
104102103070149	21	1,960	Bright	zS	416.3	253	SupplierStandard	215
104102106070149	21	1,960	Bright	zZ	416.3	253	SupplierStandard	215
104102105270149	21	1,960	Galvanized	sS	416.3	253	SupplierStandard	215
104102104270149	21	1,960	Galvanized	sZ	416.3	253	SupplierStandard	215
104102103270149	21	1,960	Galvanized	zS	416.3	253	SupplierStandard	215
104102106270149	21	1,960	Galvanized	zZ	416.3	253	SupplierStandard	215
104102105100149	21	2,160	Bright	sS	435.3	253	SupplierStandard	215
104102104100149	21	2,160	Bright	sZ	435.3	253	SupplierStandard	215
104102103100149	21	2,160	Bright	zS	435.3	253	SupplierStandard	215
104102106100149	21	2,160	Bright	zZ	435.3	253	SupplierStandard	215
104102105300149	21	2,160	Galvanized	sS	435.3	253	SupplierStandard	215

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104102104300149	21	2,160	Galvanized	sZ	435.3	253	SupplierStandard	215
104102103300149	21	2,160	Galvanized	zS	435.3	253	SupplierStandard	215
104102106300149	21	2,160	Galvanized	zZ	435.3	253	SupplierStandard	215
104102205070149	22	1,960	Bright	sS	456.9	277	SupplierStandard	236
104102204070149	22	1,960	Bright	sZ	456.9	277	SupplierStandard	236
104102203070149	22	1,960	Bright	zS	456.9	277	SupplierStandard	236
104102206070149	22	1,960	Bright	zZ	456.9	277	SupplierStandard	236
104102205270149	22	1,960	Galvanized	sS	456.9	277	SupplierStandard	236
104102204270149	22	1,960	Galvanized	sZ	456.9	277	SupplierStandard	236
104102203270149	22	1,960	Galvanized	zS	456.9	277	SupplierStandard	236
104102206270149	22	1,960	Galvanized	zZ	456.9	277	SupplierStandard	236
104102205100149	22	2,160	Bright	sS	477.7	277	SupplierStandard	236
104102204100149	22	2,160	Bright	sZ	477.7	277	SupplierStandard	236
104102203100149	22	2,160	Bright	zS	477.7	277	SupplierStandard	236
104102206100149	22	2,160	Bright	zZ	477.7	277	SupplierStandard	236
104102205300149	22	2,160	Galvanized	sS	477.7	277	SupplierStandard	236
104102204300149	22	2,160	Galvanized	sZ	477.7	277	SupplierStandard	236
104102203300149	22	2,160	Galvanized	zS	477.7	277	SupplierStandard	236
104102206300149	22	2,160	Galvanized	zZ	477.7	277	SupplierStandard	236
104102245070149	22.4	1,960	Bright	sS	473.6	283	SupplierStandard	240
104102244070149	22.4	1,960	Bright	sZ	473.6	283	SupplierStandard	240
104102243070149	22.4	1,960	Bright	zS	473.6	283	SupplierStandard	240
104102246070149	22.4	1,960	Bright	zZ	473.6	283	SupplierStandard	240
104102245270149	22.4	1,960	Galvanized	sS	473.6	283	SupplierStandard	240
104102244270149	22.4	1,960	Galvanized	sZ	473.6	283	SupplierStandard	240
104102243270149	22.4	1,960	Galvanized	zS	473.6	283	SupplierStandard	240
104102246270149	22.4	1,960	Galvanized	zZ	473.6	283	SupplierStandard	240
104102245100149	22.4	2,160	Bright	sS	495.3	283	SupplierStandard	240
104102244100149	22.4	2,160	Bright	sZ	495.3	283	SupplierStandard	240
104102243100149	22.4	2,160	Bright	zS	495.3	283	SupplierStandard	240
104102246100149	22.4	2,160	Bright	zZ	495.3	283	SupplierStandard	240

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104102245300149	22.4	2,160	Galvanized	sS	495.3	283	SupplierStandard	240
104102244300149	22.4	2,160	Galvanized	sZ	495.3	283	SupplierStandard	240
104102243300149	22.4	2,160	Galvanized	zS	495.3	283	SupplierStandard	240
104102246300149	22.4	2,160	Galvanized	zZ	495.3	283	SupplierStandard	240
104102305070149	23	1,960	Bright	sS	499.3	303	SupplierStandard	258
104102304070149	23	1,960	Bright	sZ	499.3	303	SupplierStandard	258
104102303070149	23	1,960	Bright	zS	499.3	303	SupplierStandard	258
104102306070149	23	1,960	Bright	zZ	499.3	303	SupplierStandard	258
104102305270149	23	1,960	Galvanized	sS	499.3	303	SupplierStandard	258
104102304270149	23	1,960	Galvanized	sZ	499.3	303	SupplierStandard	258
104102303270149	23	1,960	Galvanized	zS	499.3	303	SupplierStandard	258
104102306270149	23	1,960	Galvanized	zZ	499.3	303	SupplierStandard	258
104102305100149	23	2,160	Bright	sS	522.2	303	SupplierStandard	258
104102304100149	23	2,160	Bright	sZ	522.2	303	SupplierStandard	258
104102303100149	23	2,160	Bright	zS	522.2	303	SupplierStandard	258
104102306100149	23	2,160	Bright	zZ	522.2	303	SupplierStandard	258
104102305300149	23	2,160	Galvanized	sS	522.2	303	SupplierStandard	258
104102304300149	23	2,160	Galvanized	sZ	522.2	303	SupplierStandard	258
104102303300149	23	2,160	Galvanized	zS	522.2	303	SupplierStandard	258
104102306300149	23	2,160	Galvanized	zZ	522.2	303	SupplierStandard	258
104102405070149	24	1,960	Bright	sS	543.7	330	SupplierStandard	281
104102404070149	24	1,960	Bright	sZ	543.7	330	SupplierStandard	281
104102403070149	24	1,960	Bright	zS	543.7	330	SupplierStandard	281
104102406070149	24	1,960	Bright	zZ	543.7	330	SupplierStandard	281
104102405270149	24	1,960	Galvanized	sS	543.7	330	SupplierStandard	281
104102404270149	24	1,960	Galvanized	sZ	543.7	330	SupplierStandard	281
104102403270149	24	1,960	Galvanized	zS	543.7	330	SupplierStandard	281
104102406270149	24	1,960	Galvanized	zZ	543.7	330	SupplierStandard	281
104102405100149	24	2,160	Bright	sS	568.6	330	SupplierStandard	281
104102404100149	24	2,160	Bright	sZ	568.6	330	SupplierStandard	281
104102403100149	24	2,160	Bright	zS	568.6	330	SupplierStandard	281

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104102406100149	24	2,160	Bright	zZ	568.6	330	SupplierStandard	281
104102405300149	24	2,160	Galvanized	sS	568.6	330	SupplierStandard	281
104102404300149	24	2,160	Galvanized	sZ	568.6	330	SupplierStandard	281
104102403300149	24	2,160	Galvanized	zS	568.6	330	SupplierStandard	281
104102406300149	24	2,160	Galvanized	zZ	568.6	330	SupplierStandard	281
104102505070149	25	1,960	Bright	sS	590	358	SupplierStandard	305
104102504070149	25	1,960	Bright	sZ	590	358	SupplierStandard	305
104102503070149	25	1,960	Bright	zS	590	358	SupplierStandard	305
104102506070149	25	1,960	Bright	zZ	590	358	SupplierStandard	305
104102505270149	25	1,960	Galvanized	sS	590	358	SupplierStandard	305
104102504270149	25	1,960	Galvanized	sZ	590	358	SupplierStandard	305
104102503270149	25	1,960	Galvanized	zS	590	358	SupplierStandard	305
104102506270149	25	1,960	Galvanized	zZ	590	358	SupplierStandard	305
104102505100149	25	2,160	Bright	sS	616.9	358	SupplierStandard	305
104102504100149	25	2,160	Bright	sZ	616.9	358	SupplierStandard	305
104102503100149	25	2,160	Bright	zS	616.9	358	SupplierStandard	305
104102506100149	25	2,160	Bright	zZ	616.9	358	SupplierStandard	305
104102505300149	25	2,160	Galvanized	sS	616.9	358	SupplierStandard	305
104102504300149	25	2,160	Galvanized	sZ	616.9	358	SupplierStandard	305
104102503300149	25	2,160	Galvanized	zS	616.9	358	SupplierStandard	305
104102506300149	25	2,160	Galvanized	zZ	616.9	358	SupplierStandard	305
104102545070149	25.4	1,960	Bright	sS	609	370	SupplierStandard	314
104102544070149	25.4	1,960	Bright	sZ	609	370	SupplierStandard	314
104102543070149	25.4	1,960	Bright	zS	609	370	SupplierStandard	314
104102546070149	25.4	1,960	Bright	zZ	609	370	SupplierStandard	314
104102545270149	25.4	1,960	Galvanized	sS	609	370	SupplierStandard	314
104102544270149	25.4	1,960	Galvanized	sZ	609	370	SupplierStandard	314
104102543270149	25.4	1,960	Galvanized	zS	609	370	SupplierStandard	314
104102546270149	25.4	1,960	Galvanized	zZ	609	370	SupplierStandard	314
104102545100149	25.4	2,160	Bright	sS	636.8	370	SupplierStandard	314
104102544100149	25.4	2,160	Bright	sZ	636.8	370	SupplierStandard	314

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104102543100149	25.4	2,160	Bright	zS	636.8	370	SupplierStandard	314
104102546100149	25.4	2,160	Bright	zZ	636.8	370	SupplierStandard	314
104102545300149	25.4	2,160	Galvanized	sS	636.8	370	SupplierStandard	314
104102544300149	25.4	2,160	Galvanized	sZ	636.8	370	SupplierStandard	314
104102543300149	25.4	2,160	Galvanized	zS	636.8	370	SupplierStandard	314
104102546300149	25.4	2,160	Galvanized	zZ	636.8	370	SupplierStandard	314
104102605070149	26	1,960	Bright	sS	638.1	388	SupplierStandard	329
104102604070149	26	1,960	Bright	sZ	638.1	388	SupplierStandard	329
104102603070149	26	1,960	Bright	zS	638.1	388	SupplierStandard	329
104102606070149	26	1,960	Bright	zZ	638.1	388	SupplierStandard	329
104102605270149	26	1,960	Galvanized	sS	638.1	388	SupplierStandard	329
104102604270149	26	1,960	Galvanized	sZ	638.1	388	SupplierStandard	329
104102603270149	26	1,960	Galvanized	zS	638.1	388	SupplierStandard	329
104102606270149	26	1,960	Galvanized	zZ	638.1	388	SupplierStandard	329
104102605100149	26	2,160	Bright	sS	667.3	388	SupplierStandard	329
104102604100149	26	2,160	Bright	sZ	667.3	388	SupplierStandard	329
104102603100149	26	2,160	Bright	zS	667.3	388	SupplierStandard	329
104102606100149	26	2,160	Bright	zZ	667.3	388	SupplierStandard	329
104102605300149	26	2,160	Galvanized	sS	667.3	388	SupplierStandard	329
104102604300149	26	2,160	Galvanized	sZ	667.3	388	SupplierStandard	329
104102603300149	26	2,160	Galvanized	zS	667.3	388	SupplierStandard	329
104102606300149	26	2,160	Galvanized	zZ	667.3	388	SupplierStandard	329
104102705070149	27	1,960	Bright	sS	688.1	418	SupplierStandard	355
104102704070149	27	1,960	Bright	sZ	688.1	418	SupplierStandard	355
104102703070149	27	1,960	Bright	zS	688.1	418	SupplierStandard	355
104102706070149	27	1,960	Bright	zZ	688.1	418	SupplierStandard	355
104102705270149	27	1,960	Galvanized	sS	688.1	418	SupplierStandard	355
104102704270149	27	1,960	Galvanized	sZ	688.1	418	SupplierStandard	355
104102703270149	27	1,960	Galvanized	zS	688.1	418	SupplierStandard	355
104102706270149	27	1,960	Galvanized	zZ	688.1	418	SupplierStandard	355
104102705100149	27	2,160	Bright	sS	719.6	418	SupplierStandard	355

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104102704100149	27	2,160	Bright	sZ	719.6	418	SupplierStandard	355
104102703100149	27	2,160	Bright	zS	719.6	418	SupplierStandard	355
104102706100149	27	2,160	Bright	zZ	719.6	418	SupplierStandard	355
104102705300149	27	2,160	Galvanized	sS	719.6	418	SupplierStandard	355
104102704300149	27	2,160	Galvanized	sZ	719.6	418	SupplierStandard	355
104102703300149	27	2,160	Galvanized	zS	719.6	418	SupplierStandard	355
104102706300149	27	2,160	Galvanized	zZ	719.6	418	SupplierStandard	355
104102805070149	28	1,960	Bright	sS	740.1	449	SupplierStandard	382
104102804070149	28	1,960	Bright	sZ	740.1	449	SupplierStandard	382
104102803070149	28	1,960	Bright	zS	740.1	449	SupplierStandard	382
104102806070149	28	1,960	Bright	zZ	740.1	449	SupplierStandard	382
104102805270149	28	1,960	Galvanized	sS	740.1	449	SupplierStandard	382
104102804270149	28	1,960	Galvanized	sZ	740.1	449	SupplierStandard	382
104102803270149	28	1,960	Galvanized	zS	740.1	449	SupplierStandard	382
104102806270149	28	1,960	Galvanized	zZ	740.1	449	SupplierStandard	382
104102805100149	28	2,160	Bright	sS	773.9	449	SupplierStandard	382
104102804100149	28	2,160	Bright	sZ	773.9	449	SupplierStandard	382
104102803100149	28	2,160	Bright	zS	773.9	449	SupplierStandard	382
104102806100149	28	2,160	Bright	zZ	773.9	449	SupplierStandard	382
104102805300149	28	2,160	Galvanized	sS	773.9	449	SupplierStandard	382
104102804300149	28	2,160	Galvanized	sZ	773.9	449	SupplierStandard	382
104102803300149	28	2,160	Galvanized	zS	773.9	449	SupplierStandard	382
104102806300149	28	2,160	Galvanized	zZ	773.9	449	SupplierStandard	382
104102865070149	28.6	1,960	Bright	sS	772.1	469	SupplierStandard	399
104102864070149	28.6	1,960	Bright	sZ	772.1	469	SupplierStandard	399
104102863070149	28.6	1,960	Bright	zS	772.1	469	SupplierStandard	399
104102866070149	28.6	1,960	Bright	zZ	772.1	469	SupplierStandard	399
104102865270149	28.6	1,960	Galvanized	sS	772.1	469	SupplierStandard	399
104102864270149	28.6	1,960	Galvanized	sZ	772.1	469	SupplierStandard	399
104102863270149	28.6	1,960	Galvanized	zS	772.1	469	SupplierStandard	399
104102866270149	28.6	1,960	Galvanized	zZ	772.1	469	SupplierStandard	399

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104102865100149	28.6	2,160	Bright	sS	807.4	469	SupplierStandard	399
104102864100149	28.6	2,160	Bright	sZ	807.4	469	SupplierStandard	399
104102863100149	28.6	2,160	Bright	zS	807.4	469	SupplierStandard	399
104102866100149	28.6	2,160	Bright	zZ	807.4	469	SupplierStandard	399
104102865300149	28.6	2,160	Galvanized	sS	807.4	469	SupplierStandard	399
104102864300149	28.6	2,160	Galvanized	sZ	807.4	469	SupplierStandard	399
104102863300149	28.6	2,160	Galvanized	zS	807.4	469	SupplierStandard	399
104102866300149	28.6	2,160	Galvanized	zZ	807.4	469	SupplierStandard	399
104102905070149	29	1,960	Bright	sS	793.9	482	SupplierStandard	409.9
104102904070149	29	1,960	Bright	sZ	793.9	482	SupplierStandard	409.9
104102903070149	29	1,960	Bright	zS	793.9	482	SupplierStandard	409.9
104102906070149	29	1,960	Bright	zZ	793.9	482	SupplierStandard	409.9
104102905270149	29	1,960	Galvanized	sS	793.9	482	SupplierStandard	409.9
104102904270149	29	1,960	Galvanized	sZ	793.9	482	SupplierStandard	409.9
104102903270149	29	1,960	Galvanized	zS	793.9	482	SupplierStandard	409.9
104102906270149	29	1,960	Galvanized	zZ	793.9	482	SupplierStandard	409.9
104102905100149	29	2,160	Bright	sS	830.1	482	SupplierStandard	409.9
104102904100149	29	2,160	Bright	sZ	830.1	482	SupplierStandard	409.9
104102903100149	29	2,160	Bright	zS	830.1	482	SupplierStandard	409.9
104102906100149	29	2,160	Bright	zZ	830.1	482	SupplierStandard	409.9
104102905300149	29	2,160	Galvanized	sS	830.1	482	SupplierStandard	409.9
104102904300149	29	2,160	Galvanized	sZ	830.1	482	SupplierStandard	409.9
104102903300149	29	2,160	Galvanized	zS	830.1	482	SupplierStandard	409.9
104102906300149	29	2,160	Galvanized	zZ	830.1	482	SupplierStandard	409.9
104103005070149	30	1,960	Bright	sS	849.6	516	SupplierStandard	439
104103004070149	30	1,960	Bright	sZ	849.6	516	SupplierStandard	439
104103003070149	30	1,960	Bright	zS	849.6	516	SupplierStandard	439
104103006070149	30	1,960	Bright	zZ	849.6	516	SupplierStandard	439
104103005270149	30	1,960	Galvanized	sS	849.6	516	SupplierStandard	439
104103004270149	30	1,960	Galvanized	sZ	849.6	516	SupplierStandard	439
104103003270149	30	1,960	Galvanized	zS	849.6	516	SupplierStandard	439

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104103006270149	30	1,960	Galvanized	zZ	849.6	516	SupplierStandard	439
104103005100149	30	2,160	Bright	sS	888.4	516	SupplierStandard	439
104103004100149	30	2,160	Bright	sZ	888.4	516	SupplierStandard	439
104103003100149	30	2,160	Bright	zS	888.4	516	SupplierStandard	439
104103006100149	30	2,160	Bright	zZ	888.4	516	SupplierStandard	439
104103005300149	30	2,160	Galvanized	sS	888.4	516	SupplierStandard	439
104103004300149	30	2,160	Galvanized	sZ	888.4	516	SupplierStandard	439
104103003300149	30	2,160	Galvanized	zS	888.4	516	SupplierStandard	439
104103006300149	30	2,160	Galvanized	zZ	888.4	516	SupplierStandard	439
104103105070149	31	1,960	Bright	sS	907.1	551	SupplierStandard	468
104103104070149	31	1,960	Bright	sZ	907.1	551	SupplierStandard	468
104103103070149	31	1,960	Bright	zS	907.1	551	SupplierStandard	468
104103106070149	31	1,960	Bright	zZ	907.1	551	SupplierStandard	468
104103105270149	31	1,960	Galvanized	sS	907.1	551	SupplierStandard	468
104103104270149	31	1,960	Galvanized	sZ	907.1	551	SupplierStandard	468
104103103270149	31	1,960	Galvanized	zS	907.1	551	SupplierStandard	468
104103106270149	31	1,960	Galvanized	zZ	907.1	551	SupplierStandard	468
104103105100149	31	2,160	Bright	sS	948.6	551	SupplierStandard	468
104103104100149	31	2,160	Bright	sZ	948.6	551	SupplierStandard	468
104103103100149	31	2,160	Bright	zS	948.6	551	SupplierStandard	468
104103106100149	31	2,160	Bright	zZ	948.6	551	SupplierStandard	468
104103105300149	31	2,160	Galvanized	sS	948.6	551	SupplierStandard	468
104103104300149	31	2,160	Galvanized	sZ	948.6	551	SupplierStandard	468
104103103300149	31	2,160	Galvanized	zS	948.6	551	SupplierStandard	468
104103106300149	31	2,160	Galvanized	zZ	948.6	551	SupplierStandard	468
104103205070149	32	1,960	Bright	sS	966.6	587	SupplierStandard	499
104103203070149	32	1,960	Bright	zS	966.6	587	SupplierStandard	499
104103206070149	32	1,960	Bright	zZ	966.6	587	SupplierStandard	499
104103205270149	32	1,960	Galvanized	sS	966.6	587	SupplierStandard	499
104103203270149	32	1,960	Galvanized	zS	966.6	587	SupplierStandard	499
104103206270149	32	1,960	Galvanized	zZ	966.6	587	SupplierStandard	499

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104103205100149	32	2,160	Bright	sS	1,011	587	SupplierStandard	499
104103203100149	32	2,160	Bright	zS	1,011	587	SupplierStandard	499
104103206100149	32	2,160	Bright	zZ	1,011	587	SupplierStandard	499
104103205300149	32	2,160	Galvanized	sS	1,011	587	SupplierStandard	499
104103203300149	32	2,160	Galvanized	zS	1,011	587	SupplierStandard	499
104103206300149	32	2,160	Galvanized	zZ	1,011	587	SupplierStandard	499
104103305070149	33	1,960	Bright	sS	1,028	624	SupplierStandard	531
104103303070149	33	1,960	Bright	zS	1,028	624	SupplierStandard	531
104103306070149	33	1,960	Bright	zZ	1,028	624	SupplierStandard	531
104103305270149	33	1,960	Galvanized	sS	1,028	624	SupplierStandard	531
104103303270149	33	1,960	Galvanized	zS	1,028	624	SupplierStandard	531
104103306270149	33	1,960	Galvanized	zZ	1,028	624	SupplierStandard	531
104103305100149	33	2,160	Bright	sS	1,075	624	SupplierStandard	531
104103303100149	33	2,160	Bright	zS	1,075	624	SupplierStandard	531
104103306100149	33	2,160	Bright	zZ	1,075	624	SupplierStandard	531
104103305300149	33	2,160	Galvanized	sS	1,075	624	SupplierStandard	531
104103303300149	33	2,160	Galvanized	zS	1,075	624	SupplierStandard	531
104103306300149	33	2,160	Galvanized	zZ	1,075	624	SupplierStandard	531
104103405070149	34	1,960	Bright	sS	1,091	663	SupplierStandard	563
104103403070149	34	1,960	Bright	zS	1,091	663	SupplierStandard	563
104103406070149	34	1,960	Bright	zZ	1,091	663	SupplierStandard	563
104103405270149	34	1,960	Galvanized	sS	1,091	663	SupplierStandard	563
104103403270149	34	1,960	Galvanized	zS	1,091	663	SupplierStandard	563
104103406270149	34	1,960	Galvanized	zZ	1,091	663	SupplierStandard	563
104103405100149	34	2,160	Bright	sS	1,141	663	SupplierStandard	563
104103403100149	34	2,160	Bright	zS	1,141	663	SupplierStandard	563
104103406100149	34	2,160	Bright	zZ	1,141	663	SupplierStandard	563
104103405300149	34	2,160	Galvanized	sS	1,141	663	SupplierStandard	563
104103403300149	34	2,160	Galvanized	zS	1,141	663	SupplierStandard	563
104103406300149	34	2,160	Galvanized	zZ	1,141	663	SupplierStandard	563
104103505070149	35	1,960	Bright	sS	1,156	702	SupplierStandard	597

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104103503070149	35	1,960	Bright	zS	1,156	702	SupplierStandard	597
104103506070149	35	1,960	Bright	zZ	1,156	702	SupplierStandard	597
104103505270149	35	1,960	Galvanized	sS	1,156	702	SupplierStandard	597
104103503270149	35	1,960	Galvanized	zS	1,156	702	SupplierStandard	597
104103506270149	35	1,960	Galvanized	zZ	1,156	702	SupplierStandard	597
104103505100149	35	2,160	Bright	sS	1,209	702	SupplierStandard	597
104103503100149	35	2,160	Bright	zS	1,209	702	SupplierStandard	597
104103506100149	35	2,160	Bright	zZ	1,209	702	SupplierStandard	597
104103505300149	35	2,160	Galvanized	sS	1,209	702	SupplierStandard	597
104103503300149	35	2,160	Galvanized	zS	1,209	702	SupplierStandard	597
104103506300149	35	2,160	Galvanized	zZ	1,209	702	SupplierStandard	597
104103605070149	36	1,960	Bright	sS	1,223	743	SupplierStandard	632
104103603070149	36	1,960	Bright	zS	1,223	743	SupplierStandard	632
104103606070149	36	1,960	Bright	zZ	1,223	743	SupplierStandard	632
104103605270149	36	1,960	Galvanized	sS	1,223	743	SupplierStandard	632
104103603270149	36	1,960	Galvanized	zS	1,223	743	SupplierStandard	632
104103606270149	36	1,960	Galvanized	zZ	1,223	743	SupplierStandard	632
104103605100149	36	2,160	Bright	sS	1,279	743	SupplierStandard	632
104103603100149	36	2,160	Bright	zS	1,279	743	SupplierStandard	632
104103606100149	36	2,160	Bright	zZ	1,279	743	SupplierStandard	632
104103605300149	36	2,160	Galvanized	sS	1,279	743	SupplierStandard	632
104103603300149	36	2,160	Galvanized	zS	1,279	743	SupplierStandard	632
104103606300149	36	2,160	Galvanized	zZ	1,279	743	SupplierStandard	632
104103805070149	38	1,960	Bright	sS	1,363	828	SupplierStandard	704
104103803070149	38	1,960	Bright	zS	1,363	828	SupplierStandard	704
104103806070149	38	1,960	Bright	zZ	1,363	828	SupplierStandard	704
104103805270149	38	1,960	Galvanized	sS	1,363	828	SupplierStandard	704
104103803270149	38	1,960	Galvanized	zS	1,363	828	SupplierStandard	704
104103806270149	38	1,960	Galvanized	zZ	1,363	828	SupplierStandard	704
104103805100149	38	2,160	Bright	sS	1,425	828	SupplierStandard	704
104103803100149	38	2,160	Bright	zS	1,425	828	SupplierStandard	704

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104103806100149	38	2,160	Bright	zZ	1,425	828	SupplierStandard	704
104103805300149	38	2,160	Galvanized	sS	1,425	828	SupplierStandard	704
104103803300149	38	2,160	Galvanized	zS	1,425	828	SupplierStandard	704
104103806300149	38	2,160	Galvanized	zZ	1,425	828	SupplierStandard	704
104104005070149	40	1,960	Bright	sS	1,510	917	SupplierStandard	780
104104003070149	40	1,960	Bright	zS	1,510	917	SupplierStandard	780
104104006070149	40	1,960	Bright	zZ	1,510	917	SupplierStandard	780
104104005270149	40	1,960	Galvanized	sS	1,510	917	SupplierStandard	780
104104003270149	40	1,960	Galvanized	zS	1,510	917	SupplierStandard	780
104104006270149	40	1,960	Galvanized	zZ	1,510	917	SupplierStandard	780
104104005100149	40	2,160	Bright	sS	1,579	917	SupplierStandard	780
104104003100149	40	2,160	Bright	zS	1,579	917	SupplierStandard	780
104104006100149	40	2,160	Bright	zZ	1,579	917	SupplierStandard	780
104104005300149	40	2,160	Galvanized	sS	1,579	917	SupplierStandard	780
104104003300149	40	2,160	Galvanized	zS	1,579	917	SupplierStandard	780
104104006300149	40	2,160	Galvanized	zZ	1,579	917	SupplierStandard	780
104104205070149	42	1,960	Bright	sS	1,665	1,011	SupplierStandard	860
104104203070149	42	1,960	Bright	zS	1,665	1,011	SupplierStandard	860
104104206070149	42	1,960	Bright	zZ	1,665	1,011	SupplierStandard	860
104104205270149	42	1,960	Galvanized	sS	1,665	1,011	SupplierStandard	860
104104203270149	42	1,960	Galvanized	zS	1,665	1,011	SupplierStandard	860
104104206270149	42	1,960	Galvanized	zZ	1,665	1,011	SupplierStandard	860
104104205100149	42	2,160	Bright	sS	1,741	1,011	SupplierStandard	860
104104203100149	42	2,160	Bright	zS	1,741	1,011	SupplierStandard	860
104104206100149	42	2,160	Bright	zZ	1,741	1,011	SupplierStandard	860
104104205300149	42	2,160	Galvanized	sS	1,741	1,011	SupplierStandard	860
104104203300149	42	2,160	Galvanized	zS	1,741	1,011	SupplierStandard	860
104104206300149	42	2,160	Galvanized	zZ	1,741	1,011	SupplierStandard	860
104104305070149	43	1,960	Bright	sS	1,745	1,060	SupplierStandard	901
104104303070149	43	1,960	Bright	zS	1,745	1,060	SupplierStandard	901
104104306070149	43	1,960	Bright	zZ	1,745	1,060	SupplierStandard	901

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104104305270149	43	1,960	Galvanized	sS	1,745	1,060	SupplierStandard	901
104104303270149	43	1,960	Galvanized	zS	1,745	1,060	SupplierStandard	901
104104306270149	43	1,960	Galvanized	zZ	1,745	1,060	SupplierStandard	901
104104305100149	43	2,160	Bright	sS	1,825	1,060	SupplierStandard	901
104104303100149	43	2,160	Bright	zS	1,825	1,060	SupplierStandard	901
104104306100149	43	2,160	Bright	zZ	1,825	1,060	SupplierStandard	901
104104305300149	43	2,160	Galvanized	sS	1,825	1,060	SupplierStandard	901
104104303300149	43	2,160	Galvanized	zS	1,825	1,060	SupplierStandard	901
104104306300149	43	2,160	Galvanized	zZ	1,825	1,060	SupplierStandard	901
104104405070149	44	1,960	Bright	sS	1,827	1,110	SupplierStandard	944
104104403070149	44	1,960	Bright	zS	1,827	1,110	SupplierStandard	944
104104406070149	44	1,960	Bright	zZ	1,827	1,110	SupplierStandard	944
104104405270149	44	1,960	Galvanized	sS	1,827	1,110	SupplierStandard	944
104104403270149	44	1,960	Galvanized	zS	1,827	1,110	SupplierStandard	944
104104406270149	44	1,960	Galvanized	zZ	1,827	1,110	SupplierStandard	944
104104405100149	44	2,160	Bright	sS	1,911	1,110	SupplierStandard	944
104104403100149	44	2,160	Bright	zS	1,911	1,110	SupplierStandard	944
104104406100149	44	2,160	Bright	zZ	1,911	1,110	SupplierStandard	944
104104405300149	44	2,160	Galvanized	sS	1,911	1,110	SupplierStandard	944
104104403300149	44	2,160	Galvanized	zS	1,911	1,110	SupplierStandard	944
104104406300149	44	2,160	Galvanized	zZ	1,911	1,110	SupplierStandard	944
104104505070149	45	1,960	Bright	sS	1,911	1,161	SupplierStandard	987
104104503070149	45	1,960	Bright	zS	1,911	1,161	SupplierStandard	987
104104506070149	45	1,960	Bright	zZ	1,911	1,161	SupplierStandard	987
104104505270149	45	1,960	Galvanized	sS	1,911	1,161	SupplierStandard	987
104104503270149	45	1,960	Galvanized	zS	1,911	1,161	SupplierStandard	987
104104506270149	45	1,960	Galvanized	zZ	1,911	1,161	SupplierStandard	987
104104505100149	45	2,160	Bright	sS	1,999	1,161	SupplierStandard	987
104104503100149	45	2,160	Bright	zS	1,999	1,161	SupplierStandard	987
104104506100149	45	2,160	Bright	zZ	1,999	1,161	SupplierStandard	987
104104505300149	45	2,160	Galvanized	sS	1,999	1,161	SupplierStandard	987

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104104503300149	45	2,160	Galvanized	zS	1,999	1,161	SupplierStandard	987
104104506300149	45	2,160	Galvanized	zZ	1,999	1,161	SupplierStandard	987
104104605070149	46	1,960	Bright	sS	1,997	1,213	SupplierStandard	1,031
104104603070149	46	1,960	Bright	zS	1,997	1,213	SupplierStandard	1,031
104104606070149	46	1,960	Bright	zZ	1,997	1,213	SupplierStandard	1,031
104104605270149	46	1,960	Galvanized	sS	1,997	1,213	SupplierStandard	1,031
104104603270149	46	1,960	Galvanized	zS	1,997	1,213	SupplierStandard	1,031
104104606270149	46	1,960	Galvanized	zZ	1,997	1,213	SupplierStandard	1,031
104104605100149	46	2,160	Bright	sS	2,089	1,213	SupplierStandard	1,031
104104603100149	46	2,160	Bright	zS	2,089	1,213	SupplierStandard	1,031
104104606100149	46	2,160	Bright	zZ	2,089	1,213	SupplierStandard	1,031
104104605300149	46	2,160	Galvanized	sS	2,089	1,213	SupplierStandard	1,031
104104603300149	46	2,160	Galvanized	zS	2,089	1,213	SupplierStandard	1,031
104104606300149	46	2,160	Galvanized	zZ	2,089	1,213	SupplierStandard	1,031
104104805070149	48	1,960	Bright	sS	2,175	1,321	SupplierStandard	1,123
104104803070149	48	1,960	Bright	zS	2,175	1,321	SupplierStandard	1,123
104104806070149	48	1,960	Bright	zZ	2,175	1,321	SupplierStandard	1,123
104104805270149	48	1,960	Galvanized	sS	2,175	1,321	SupplierStandard	1,123
104104803270149	48	1,960	Galvanized	zS	2,175	1,321	SupplierStandard	1,123
104104806270149	48	1,960	Galvanized	zZ	2,175	1,321	SupplierStandard	1,123
104104805100149	48	2,160	Bright	sS	2,274	1,321	SupplierStandard	1,123
104104803100149	48	2,160	Bright	zS	2,274	1,321	SupplierStandard	1,123
104104806100149	48	2,160	Bright	zZ	2,274	1,321	SupplierStandard	1,123
104104805300149	48	2,160	Galvanized	sS	2,274	1,321	SupplierStandard	1,123
104104803300149	48	2,160	Galvanized	zS	2,274	1,321	SupplierStandard	1,123
104104806300149	48	2,160	Galvanized	zZ	2,274	1,321	SupplierStandard	1,123
104105005070149	50	1,960	Bright	sS	2,360	1,433	SupplierStandard	1,218
104105003070149	50	1,960	Bright	zS	2,360	1,433	SupplierStandard	1,218
104105006070149	50	1,960	Bright	zZ	2,360	1,433	SupplierStandard	1,218
104105005270149	50	1,960	Galvanized	sS	2,360	1,433	SupplierStandard	1,218
104105003270149	50	1,960	Galvanized	zS	2,360	1,433	SupplierStandard	1,218

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
104105006270149	50	1,960	Galvanized	zZ	2,360	1,433	SupplierStandard	1,218
104105005100149	50	2,160	Bright	sS	2,468	1,433	SupplierStandard	1,218
104105003100149	50	2,160	Bright	zS	2,468	1,433	SupplierStandard	1,218
104105006100149	50	2,160	Bright	zZ	2,468	1,433	SupplierStandard	1,218
104105005300149	50	2,160	Galvanized	sS	2,468	1,433	SupplierStandard	1,218
104105003300149	50	2,160	Galvanized	zS	2,468	1,433	SupplierStandard	1,218
104105006300149	50	2,160	Galvanized	zZ	2,468	1,433	SupplierStandard	1,218
104105205070149	52	1,960	Bright	sS	2,552	1,550	SupplierStandard	1,318
104105203070149	52	1,960	Bright	zS	2,552	1,550	SupplierStandard	1,318
104105206070149	52	1,960	Bright	zZ	2,552	1,550	SupplierStandard	1,318
104105205270149	52	1,960	Galvanized	sS	2,552	1,550	SupplierStandard	1,318
104105203270149	52	1,960	Galvanized	zS	2,552	1,550	SupplierStandard	1,318
104105206270149	52	1,960	Galvanized	zZ	2,552	1,550	SupplierStandard	1,318
104105205100149	52	2,160	Bright	sS	2,669	1,550	SupplierStandard	1,318
104105203100149	52	2,160	Bright	zS	2,669	1,550	SupplierStandard	1,318
104105206100149	52	2,160	Bright	zZ	2,669	1,550	SupplierStandard	1,318
104105205300149	52	2,160	Galvanized	sS	2,669	1,550	SupplierStandard	1,318
104105203300149	52	2,160	Galvanized	zS	2,669	1,550	SupplierStandard	1,318
104105206300149	52	2,160	Galvanized	zZ	2,669	1,550	SupplierStandard	1,318
104105405070149	54	1,960	Bright	sS	2,753	1,671	SupplierStandard	1,421
104105403070149	54	1,960	Bright	zS	2,753	1,671	SupplierStandard	1,421
104105406070149	54	1,960	Bright	zZ	2,753	1,671	SupplierStandard	1,421
104105405270149	54	1,960	Galvanized	sS	2,753	1,671	SupplierStandard	1,421
104105403270149	54	1,960	Galvanized	zS	2,753	1,671	SupplierStandard	1,421
104105406270149	54	1,960	Galvanized	zZ	2,753	1,671	SupplierStandard	1,421
104105405100149	54	2,160	Bright	sS	2,878	1,671	SupplierStandard	1,421
104105403100149	54	2,160	Bright	zS	2,878	1,671	SupplierStandard	1,421
104105406100149	54	2,160	Bright	zZ	2,878	1,671	SupplierStandard	1,421
104105405300149	54	2,160	Galvanized	sS	2,878	1,671	SupplierStandard	1,421
104105403300149	54	2,160	Galvanized	zS	2,878	1,671	SupplierStandard	1,421
104105406300149	54	2,160	Galvanized	zZ	2,878	1,671	SupplierStandard	1,421

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Verotop P

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved