
Lifting Solutions Group
Axel Johnson International

Evolution TK16

Product information

zZ zS sZ G

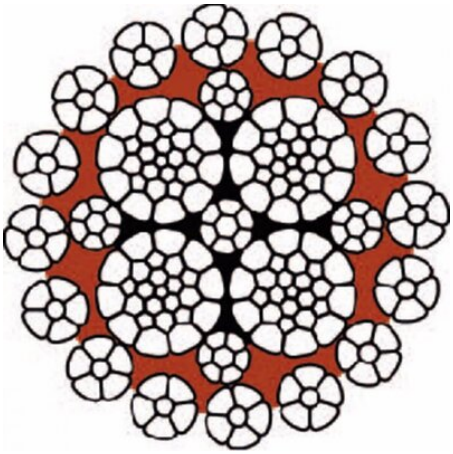

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Evolution TK16

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104101306300340	13	2,160	Galvanized	zZ	170	-	86
104101406270340	14	1,960	Galvanized	zZ	190	-	101
104101906270529	19	1,960	Galvanized	zZ	345	SupplierStandard	185
104102206270340	22	1,960	Galvanized	zZ	469	-	249
104102404270529	24	1,960	Galvanized	sZ	559	SupplierStandard	294
104102506270529	25	1,960	Galvanized	zZ	605	SupplierStandard	315
104102806270529	28	1,960	Galvanized	zZ	760	SupplierStandard	392.5
104103206270340	32	1,960	Galvanized	zZ	993	-	510
104103203270340	32	1,960	Galvanized	zS	993	-	510
104103204270529	32	1,960	Galvanized	sZ	993	SupplierStandard	510
104103403270340	34	1,960	Galvanized	zS	1,141	-	608
104103604270529	36	1,960	Galvanized	sZ	1,257	SupplierStandard	665

Certex Polska
info@certex.pl
+48 91 817 28 49

© November 2026 - All Rights Reserved