

## Master Link VIP 1-leg RUD

---

### Product information



VAK 1 master link with an all direction movable welded VRG connector, thus ensuring that only the correct chain diameter and number of strands can be connected. VIP-Master link is marked by the RUD-ID-TAG® (RFID chip) and with the clear identification number distinguished. Complete identification tag with an integrated chain testing gauge. Pre-assembled connecting bolt and tensioning sleeve.

... [Read more](#)

---

**Marking:** According to standard


**Standard:** EN 1677-4

**Safety factor:** 4:1

**Класс:** 10

## Master Link VIP 1-leg RUD

### Blueprint

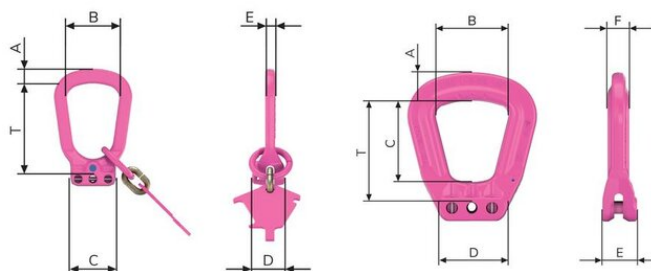

### Technical data

Код товара	Код	WLL ton	A mm	B mm	C mm	D mm	E mm	T mm	F mm	Вес kg
402100060830	VAK-1/2-4	0,63	9	30	28	20	6	55	-	0,12
402100150831	VBK-1-16	1,5	13	25	54	-	-	82	-	0,38
402100150830	VAK-1-6	1,5	13	60	110	-	-	138	-	0,54
402100150832	VSAK-1-6 / 140	1,5	18	140	260	-	-	342	-	1,95
402100250831	VBK-1-8	2,5	16	34	70	-	-	107	-	0,72
402100250830	VAK-1-8	2,5	16	60	110	-	-	147	-	0,9
402100250832	VSAK-1-8 / 140	2,5	22	140	260	-	-	367	-	3,2
402100250833	VSAK-1-8 / 190	2,5	22	190	350	-	-	457	-	3,67
402100400831	VBK-1-10	4	18	40	85	-	-	131	-	1,15
402100400830	VAK-1-10	4	18	75	135	-	-	181	-	1,44
402100400832	VSAK-1-10 / 140	4	26	140	260	-	-	391	-	3,4
402100400833	VSAK-1-10 / 190	4	26	190	350	-	-	481	-	5,34
402100400834	VSAK-1-10 / 250	4	36	250	460	-	-	591	-	11,77
402100670831	VBK-1-13	6,7	22	50	115	-	-	174	-	2,21
402100670830	VAK-1-13	6,7	22	90	160	-	-	218	-	2,68
402100670832	VSAK-1-13 / 140	6,7	32	140	260	-	-	433	-	7,35
402100670833	VSAK-1-13 / 190	6,7	32	190	350	-	-	523	-	8,7
402100670834	VSAK-1-13 / 250	6,7	36	250	460	-	-	634	-	12,83
402101000831	VBK-1-16	10	26	65	140	-	-	211	-	3,84
402101000830	VAK-1-16	10	26	100	180	-	-	250	-	4,35
402101000832	VSAK-1-16 / 140	10	32	140	260	-	-	471	-	8,96
402101000833	VSAK-1-16 / 190	10	36	190	350	-	-	560	-	12,13

## Master Link VIP 1-leg RUD

### Technical data

Код товара	Код	WLL ton	A mm	B mm	C mm	D mm	E mm	T mm	F mm	Вес kg
402101000834	VSAK-1-16 / 250	10	40	250	460	-	-	671	-	17,2
402101600830	VBK-1-20	16	32	75	170	-	-	264	-	7,65
402101600831	VAK-1-20	16	40	180	340	-	-	434	-	14,74
402101600832	VSAK-1-20 / 250	16	45	250	460	-	-	724	-	28,08
402102000831	VBK-1-22	20	36	110	200	-	-	294	-	9,02
402102000830	VAK-1-22	20	45	180	340	-	-	434	-	17,99
402102000832	VSAK-1-22 / 250	20	51	250	460	-	-	754	-	34,52
402103150831	VBK-1/2-28	31,5	60	190	265	240	120	322	55	31,93
402103150830	VAK-1/2-28	31,5	100	250	280	208	120	360	76	64,3